


Telephone cable

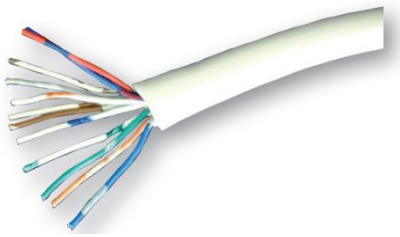

Description

This range of telephone cable is suitable for modern day installation

Features

- Complies with CW1308
 - Each pair is twisted together
- Conductor
- Bare copper
 - 0.4mm Ø nominal
- Insulation
- PVC
 - 0.8mm Ø nominal
- Sheath
- Standard PVC
 - White
 - 1902/2 – 3.4mm Ø nominal
 - 1902/3 – 4.0mm Ø nominal
 - 1902/4 – 4.6mm Ø nominal
 - 1902/6 – 5.5mm Ø nominal

Range

2 Pair telephone cable	100m	1902/2
3 Pair telephone cable	100m	1902/3
4 Pair telephone cable	100m	1902/4
6 Pair telephone cable	100m	1902/6

Technical Specification

Conductor resistance	< 16.42Ω @ 20°C, DC
Insulation resistance	>200MΩ/m @ 20°C
Rated temperature	80°C
Rated voltage	30Vdc

Core Colours

	1902/2	1902/3	1902/4	1902/6
Pair 1	W / B B / W	W / B B / W	W / B B / W	W / B B / W
Pair 2	W / O O / W	W / O O / W	W / O O / W	W / O O / W
Pair 3	n/a	W / G G / W	W / G G / W	W / G G / W
Pair 4	n/a	n/a	W / Br Br / W	W / Br Br / W
Pair 5	n/a	n/a	n/a	W / Gr Gr / W
Pair 6	n/a	n/a	n/a	R / B B / R

W = White Br = Brown
 B = Blue Gr = Grey
 O = Orange R = Red
 G = Green

First colour is base colour, second is stripe colour

Standards

- RoHS