


13A Socket Outlets

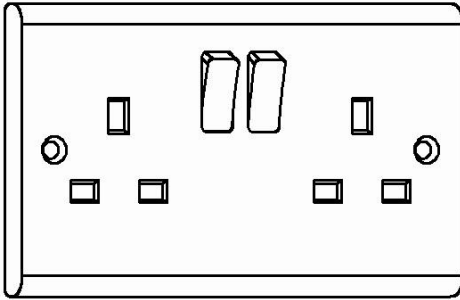

Features

- Unique slim profile with curved top and bottom edges
- Concave rockers
- Only one size 4mm screwdriver needed
- Terminals have clearly embossed and white printed markings
- Colour coded terminals
- Top facing terminal screws
- DP switch versions
- 2 earth terminals on DP sockets
- Most products have angled terminals to aid installation
- Terminals have large lead-ins
- 25-year guarantee

Technical Specification

Voltage rating	250Vac
Current Rating	13A per outlet
Contact gap	3mm
Frontplate material	Urea formaldehyde

Urea flammability classification UL94 grade V-0

No user serviceable parts

Standards

- BS 1363: Part 2

Description

A range of 1g and 2g socket outlets with either single or double switches, or unswitched.

This uniquely shaped range is easy to install, with coloured terminals, clear white terminal markings and is supplied in individual protective bags.

Range

Unswitched- 13 Amp

1g unswitched	S1206
2g unswitched	S1208

Single Pole – 13Amp

1g recessed SP switch	S1207R
1g standard SP switch	S1207S
2g recessed SP switch	S1209R
2g standard SP switch	S1209S

Double Pole – 13Amp

1g standard DP switch	S1207SDP
1g standard DP switch & neon	S1207DPP
2g standard DP switch	S1209SDP
2g standard DP switch & neon	S1209DPP
2g standard outboard DP switch	S1293
2g standard outboard rockers clean earth	S1296
Fixing screw caps	S1419WH

Longer Length Fixing Screw

50mm Length (Pack of 10) - chrome	SP0001CH
75mm Length (Pack of 10) - chrome	SP0003CH

Back Boxes

Minimum recommended depth

	Flush 25mm	Dry lining 35mm	Surface 25mm
1g	DB162	DB2540	V1221
2g	DB163	DB2541	V1223

Terminal Capacity

	2.5mm ²	4mm ²	6mm ²	10mm ²
L & N	4	3	2	1