


## 13A Socket with 3.4A USB Charging Ports

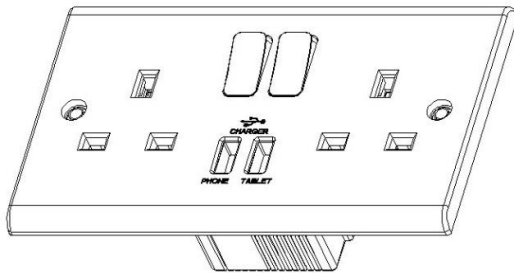

### Description

13A Socket with high current USB charging ports, for simultaneous charging of smart phones, tablets and other portable devices.

### Features

- 2g 13A DP Switch Socket with two high powered USB charging ports
- Replaces existing standard 2g socket
- USB ports deliver up to 3.4A (2.4A +1A simultaneously)
- can replace existing socket – see Back Boxes
- Supplied with 10mm spacer for fitting into 25mm boxes
- 2-year guarantee

### Technical Specification & Features

Supply voltage	240Vac
Socket rating	13A
Switch	double pole
USB ports output	“phone” 5V 1000mA “tablet” 5V 2400mA
Standby current	1.2mA
Terminal capacity	4 x 2.5mm <sup>2</sup>
Frontplate material	Urea formaldehyde

Urea flammability classification UL94 grade V-0

Switches control 13A sockets, not USB charging ports

No user serviceable parts

### Range

13A socket, USB Charging Ports      S1298

### Back Boxes

Slimline	35mm – can fit in 25mm back box using spacer provided
Slimline Décor	35mm
Slimline Screwless	35mm

Minimum recommended depth

### Terminal Capacity

	2.5mm <sup>2</sup>	4mm <sup>2</sup>	6mm <sup>2</sup>	10mm <sup>2</sup>
L & N	4	3	2	1

### Standards

- BS 1363
- BS 5733
- EN 60950-1