


13A Socket with 3.4A USB Charging Ports

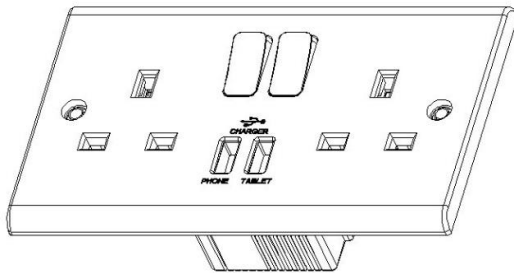

Description

13A Socket with high current USB charging ports, for simultaneous charging of smart phones, tablets and other portable devices.

Features

- Black or white inserts available
- Metal capped rockers
- Gasket pre-fitted to the accessory to prevent tarnishing
- Protective film on frontplate prevents damage during installation
- 2g 13A DP Switch Socket with two high powered USB charging ports
- Replaces existing standard 2g socket
- USB ports deliver up to 3.4A (2.4A +1A simultaneously)
- can replace existing socket – see Back Boxes
- Angled, top facing terminals screws
- Captive and backed out terminals
- Colour coded terminals
- Clear white terminal markings

Technical Specification & Features

Supply voltage	240Vac
Socket rating	13A
Switch	double pole
USB ports output	phone 5V 1000mA tablet 5V 2400mA
Standby current	1.2mA
Terminal capacity	4 x 2.5mm ²

- Switches control 13A sockets, not USB charging ports
- No user serviceable parts

Standards

- BS 1363
- BS 5733
- EN 60950-1

Range

13A socket, USB Charging Ports	SD1298CHW
13A socket, USB Charging Ports	SD1298CHB
13A socket, USB Charging Ports	SD1298SCW
13A socket, USB Charging Ports	SD1298SCB

Suffix finish with

Chrome	CH
Satin Chrome	SC
White or Black inserts	W or B

Back Boxes

Slimline	35mm – can fit in 25mm back box using spacer provided
Slimline Décor	35mm
Slimline Screwless	

Minimum recommended depth

Terminal Capacity

	2.5mm ²	4mm ²	6mm ²	10mm ²
L & N	4	3	2	1