


## 13A Socket Outlets

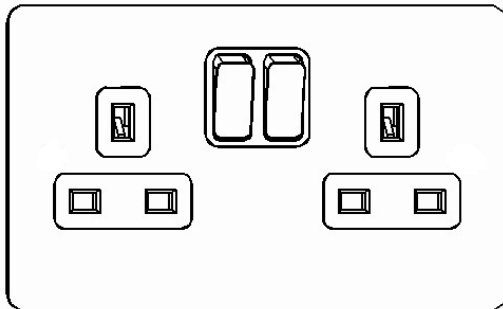

### Description

A range of 1g and 2g socket outlets with either single or double switches, or unswitched. This uniquely styled range has concealed screws behind a smooth frontplate with an ultra slim profile.

### Features

- Metal frontplates
- Concave rockers
- Only one size 4mm screwdriver needed
- Clear white markings
- Colour coded terminals
- Top facing terminal screws
- DP switch versions
- 2 earth terminals on DP sockets
- Terminals have large lead-ins
- 25-year guarantee

### Range

1 gang switched	8531
2 gang switched	8532
1 gang unswitched	8535
2 gang unswitched	8536

### Suffix finish with

Chrome	CH
Satin Chrome	SC
Black Nickel	BN
White	WH
White or Black inserts	W or B

### Technical Specification

Voltage rating	250Vac
Current Rating	13A per outlet
Contact gap	3mm

No user serviceable parts

### Back Boxes

Minimum recommended depth

	Flush	Dry lining	Surface
	35mm	35mm	33mm
1g	DB164	DB2547	V1222
2g	DB165	DB2548	V1224

### Standards

- BS 1363 Part 2 : 1995

### Terminal Capacity

	2.5mm <sup>2</sup>	4mm <sup>2</sup>	6mm <sup>2</sup>	10mm <sup>2</sup>
L & N	4	3	2	1