


13A Socket Outlets

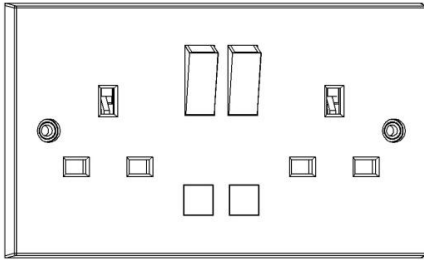

Description

A range of 1g and 2g socket outlets.

This moulded white wiring range is suited to new houses and retrofit installations, as well as commercial environments.

Features

- Twin brass earth terminal on 2 gang switched sockets
- Red flagged switch indicator
- All 13A sockets comply with BS 1363: Part 2
- 10-year guarantee

Range

1 gang unswitched	V1206
1 gang recessed switched	V1207R
1 gang standard switched	V1207S
1 gang switched DP	V1207SDP
1 gang switched DP with neon	V1207DPP
2 gang unswitched	V1208
2 gang recessed switched	V1209R
2 gang standard switched	V1209S
2 gang switched DP	V1209SDP
2 gang switched DP with neon	V1209DPP

Technical Specification

Voltage rating	250Vac
Current Rating	13A per outlet
Contact gap	3mm
Plate thickness	10mm

No user serviceable parts

Back Boxes

Minimum recommended depth

	Flush	Dry lining	Surface
	25mm	35mm	25mm
1g	DB162	DB2540	V1221
2g	DB163	DB2541	V1223

Standards

- BS 1363 Part 2 : 1995

Terminal Capacity

	2.5mm ²	4mm ²	6mm ²	10mm ²
L & N	4	3	2	1