


Architrave Switches

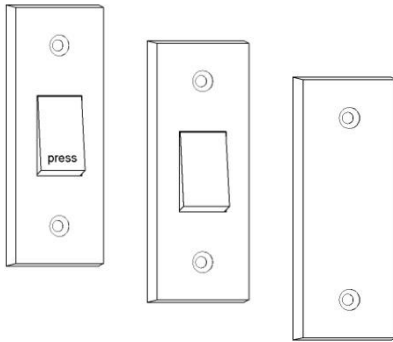

Description

This moulded white wiring range is suited to new houses and retrofit installations, as well as commercial environments.

Features

- Switches are x-rated and can be used for switching inductive or fluorescent loads without de-rating
- 10-year guarantee

Range

1g 2w	V1321
2g 2w	V1322
1g push to make/break 2w 'press'	V1323
1g blank	V1326

Technical Specification

Voltage rating	250Vac
Current Rating	10A
	X rated
Contact gap	3mm
Plate size	85 x 34 x 9mm

No user serviceable parts

Back Boxes

Minimum recommended depth

	Flush 27mm	Dry lining 35mm	Surface 16mm
1g	DB169	n/a	V1324
2g	n/a	DB2541	V1325

Standards

- BS EN 60669-1:2000

Terminal Capacity

	1mm ²	1.5mm ²	2.5mm ²	4mm ²
L	5	4	2	1