


13A Socket with USB Charging Ports

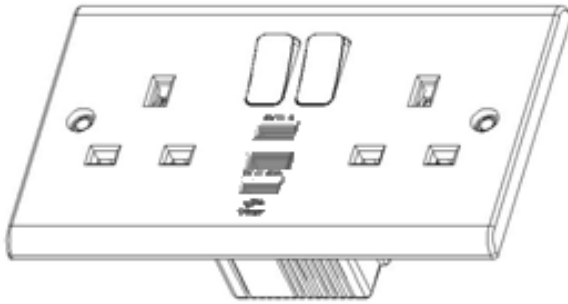

Description

13A Socket with high current USB charging ports, delivering up to 4.0A simultaneous charging current across 3 ports.

This uniquely shaped range is easy to install, with clear bold terminal markings and is supplied in individual protective bags suitable for display.

Features

- USB ports deliver up to 4A
- Simultaneous charging across 3 ports
- USB ports use auto IC technology to detect connected devices and provide optimised high-speed charging
- 2-year guarantee

Range

2g Switched and 3 USB charging ports

Vimark Curve

VC1299

Vimark Evo

VE1299

Technical Specification

Voltage	240Vac
Socket rating	13A
Switch	Single Pole
USB ports output	Top Port 1.0A Middle and Bottom Port 3.0A shared
Standby current	1.2mA
Front plate material	
Vimark Curve	Urea Formaldehyde
Vimark Evo	Stainless Steel

Switches control 13A sockets, not USB charging ports

No user serviceable parts

Back Boxes

Vimark Curve

Can fit in 25mm back box, although deeper boxers provide more wiring space

Vimark Evo

Minimum recommended depth

Terminal Capacity

	2.5mm ²	4mm ²
L & N	4	3

Standards

- BS 1363
- BS 5733
- EN 60950-1