


## 13A Socket Outlets

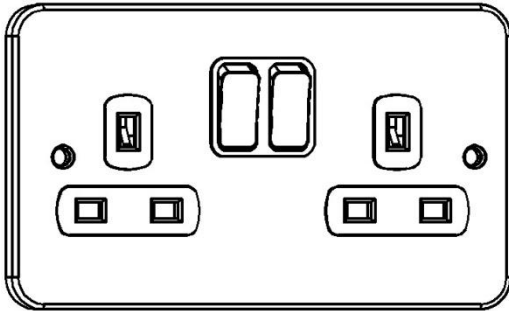

### Description

This stylish range is easy to install, with coloured terminals, clear white terminal markings and the frontplates are supplied in protective bags.

### Features

- Complete with surface mounting box
- Selected products available with and without knockouts in mounting box
- Top facing terminal screws
- Clear white terminal markings
- Terminals have large lead-ins
- Recessed earth bar
- Captive and backed out terminal screws
- Red flagged switch indicator
- Only one size 4mm screwdriver needed
- 2 earth terminals on 2 gang sockets
- 25-year guarantee

### Technical Specification

Voltage rating	250Vac
Current Rating	13A
Contact gap	3mm
Size	1g 86mm x 86mm
	2g 146mm x 86mm
Depth	46mm

No user serviceable parts

### Standards

- BS 1363 Part 2

### Range

#### Back boxes with knockouts

1 gang unswitched	M1206
2 gang unswitched	M1208
1 gang switched	M1207DP
2 gang switched	M1209DP

#### Back boxes without knockouts

1 gang switched	M1307DP
2 gang switched	M1309DP

### Back Boxes

All knockouts are 20mm diameter

	Back boxes with knockouts		Back boxes without knockouts	
	Sides	Back	Sides	Back
1g	5	1	0	1
2g	8	1	0	1

### Terminal Capacity

	1mm <sup>2</sup>	1.5mm <sup>2</sup>	2.5mm <sup>2</sup>	4mm <sup>2</sup>
L & N	4	3	2	1