


13A Socket with 3.4A USB Charging Ports

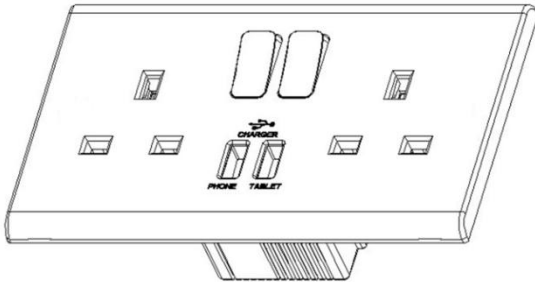

Description

13A Socket with high current USB charging ports, for simultaneous charging of smart phones, tablets and other portable devices.

This uniquely styled range has concealed screws behind a smooth frontplate with the Slimline profile.

Features

- 2g 13A DP Switch Socket with two high powered USB charging ports
- Frontplates supplied in a protective polybag
- Replaces existing standard 2g socket
- USB ports deliver up to 3.4A (2.4A +1A simultaneously)
- can replace existing socket – see Back Boxes
- White version supplied with optional 10mm spacer for fitting into 25mm boxes
- 2-year guarantee

Technical Specification & Features

Supply voltage	240Vac
Socket rating	13A
Switch	double pole
USB ports output	phone 5V 1000mA tablet 5V 2400mA
Standby current	1.2mA
Terminal capacity	4 x 2.5mm ²

Switches control 13A sockets, not USB charging ports

No user serviceable parts

Range

13A socket, USB Charging Ports 8679

Suffix finish with

White with white inserts	WHW
Chrome with white inserts	CHW

Back Boxes

Slimline Screwless 35mm

Minimum recommended depth

Terminal Capacity

	2.5mm ²	4mm ²	6mm ²	10mm ²
L & N	4	3	2	1

Standards

- BS 1363
- BS 5733
- EN 60950-1